


PANEL SPECS

- Minimum pitch recommended 2½:12
- 36" coverage with 5/8" rib height
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- High performance Enduracote paint system features an Energy Star® approved standard color offering
- Custom cut to lengths up to 40'

SUBSTRATES

- 29 gauge full hard galvanized steel
- G60 galvanized

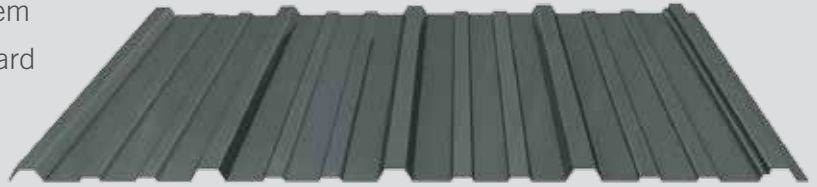

ProClad's high strength 29 gauge galvanized steel makes it perfect for post frame, agricultural and residential applications. A wide variety of colors plus excellent fire and hail impact resistance, makes ProClad a beautiful yet durable choice for your roofing and siding needs.



ProClad Warranty

- Lifetime film integrity warranty for walls & roofs
- 30 year warranty against fade and chalk for walls & roofs
- 10 year edge rust warranty against acid rain

To order, contact your local Fabral facility:

17904 E. 3100 North Road
Gridley, IL 61744
(800) 451-3974

600 15th Avenue N.E.
St. Joseph, MN 56374
(800) 873-3440

1820 East 26th Street
Marshfield, WI 54449
(800) 528-0878

