



FABRAL® SELECT SERIES® 612

BRIEF PRODUCT SPECIFICATION



Brutner Truck Sales, Dallas TX, USA

Fabral® Select Series® 612 is the perfect wall panel option when you need to add more dimension to a project. In Fabral® standard color, Old Town Gray, the Select Series® panel gave this pre-engineered building a bold accent by adding it to the roofline.

FABRAL CORE™



**You challenge us.
And we like it.**

Your vision for a building and what you want to achieve makes us think harder. It'd be easy to say - That won't work. Instead we go with - Let's see what we can do.

Fabral.com
800.884.4484

CONCEALED FASTENER WALL PANEL SELECT SERIES® 612

Fabral® Select Series® 612, a classic six up six down panel design, provides a range of profiles and configurations for architectural, commercial and industrial applications. With two options to choose from, architects and designers have at their disposal the ultimate in design versatility in a strong, durable wall panel, fascia or soffit application. The Select Series® 612 panels can be mixed with Select Series® 12 for varying design elements which demonstrates a unique approach to using metal.

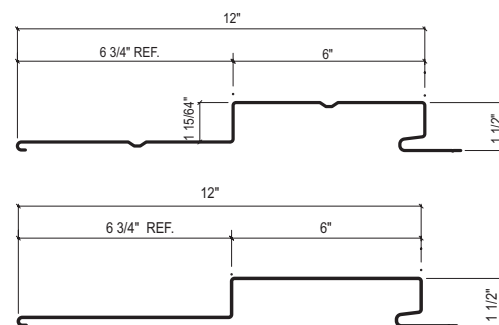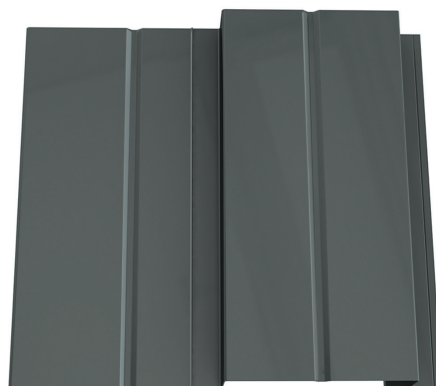

(Product details on reverse)

FABRAL®





FABRAL® SELECT SERIES® 612

BRIEF PRODUCT SPECIFICATION

MANUFACTURER DESCRIPTION

- Fabral®, 308 Alabama Blvd, Jackson, GA 30233
- **Telephone:** 800.884.4484
- **Email:** sales@fabral.com
- **Website:** www.fabral.com

PRODUCT DESCRIPTION

Acceptable Product:	Fabral® Select Series® 612	
Air Infiltration:	ASTM E283	0.10 cfm/ft ² @ 1.57 psf 0.25 cfm/ft ² @ 6.24 psf
Water Penetration:	ASTM E331	No water leakage @ 12 psf
Class 4 impact:	UL2218	
Class A fire:	UL790	

DESIGN INFORMATION

- Perforation available upon request
- Panel ends can be swedged for end laps
- Panel Length: Maximum - 45' Minimum - 4'
- Panel Width: 12" with a 6" off-set

PRODUCT INSTALLATION

Select Series® panels are recommended for siding or soffits only. When used for wall applications, Select Series® panels should only be installed vertically. Install panels plumb, level and straight so it is watertight and without waves or other distortions, allowing for thermal movement considerations. Apply sealant tape or caulking as necessary at flashing and panel joints to prevent water penetration.

PRODUCT MAINTENANCE AND WARRANTY

Fabral® provides a 20 year paint-finish warranty for cracking, chipping, peeling, fading and chalking – providing confidence in a long-lasting application.

To ensure the durability of your Select Series® panels, use proper care. Remove filings, grease, stains, marks or excess sealants from roof panels system to prevent staining. Store panels and flashings in a safe, dry environment.

RECENT PROJECTS TO REFERENCE

Segment	Project Name	Location	Quantity	Architect/Distributor
Education	Dougherty High School Addition	Albany, GA	220 sq	Richter Contracting Co, Inc.
Education	Stephens County High School	Toccoa, GA	295 sq	Orion Associates
Retail	Musashi Auto Parts	Battle Creek, MI	165 sq	Delta Design Systems Inc