

HORIZON S100[®] PRODUCT SPECIFICATIONS




GALVALUME (AZ50) WARRANTY COVERAGE

FILM INTEGRITY	LIFETIME
CHALK & FADE	30 YEARS
PERFORATION	20 YEARS



SCAN FOR COLOR AVAILABILITY



A CLASSIC DESIGN FEATURING VALUE AND BEAUTY

Horizon S100[®] is ideal for residential, post frame, and light commercial projects; the Horizon S panel offers value with performance. Longevity and aesthetic appeal are essential when investing in your home. This standing seam panel with a snap-lock design features standard shadow lines to enhance the appearance of this panel.



- 16" Coverage with 1" Seam Height
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- UL 580 Class 90 Uplift Test Rating
- High-Performance WeatherXL SMP Paint System
- Nail Flange System for Faster installation
- Factory Applied Sealant
- Shadow Lines Standard to Enhance Appearance
- Custom Cut to Lengths from 5' up to 40' *
- Must be installed Over Solid Decking
- Strippable Film for Protection in Shipping
- To Reduce the Likelihood of Oil Canning, Install an Ethofoam Backer Rod Under the Center of the Panels Prior to Installation

* Profile configuration, color options, minimum and maximum lengths may vary by region, contact Fabral for availability.



SERVING THE



LOCAL CUSTOMER SUPPORT










WEATHER RESISTANT









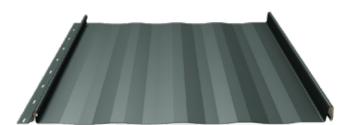

A CLASSIC DESIGN FEATURING VALUE AND BEAUTY

Horizon S100[®] is ideal for residential, post frame, and light commercial projects; the Horizon S panel offers value with performance. Longevity and aesthetic appeal are essential when investing in your home. This standing seam panel with a snap-lock design features standard shadow lines to enhance the appearance of this panel.

PANEL SPECIFICATIONS



SCREWS	SOLID		PLYWOOD
#10 x 1" Sharp Point	Decking &		Screw Spacing 12"
Wafer Head Square Drive	Weather Barrier		Center to Center
OSB or ZIP SYSTEM®		NOT RECOMMENDED	
Screw Spacing 6"		Installing Over Purlins	
Center to Center		or Existing Shingles	

