


ACFOAM® POLYISO ROOF INSULATION PACKAGE AND LOADING GUIDE

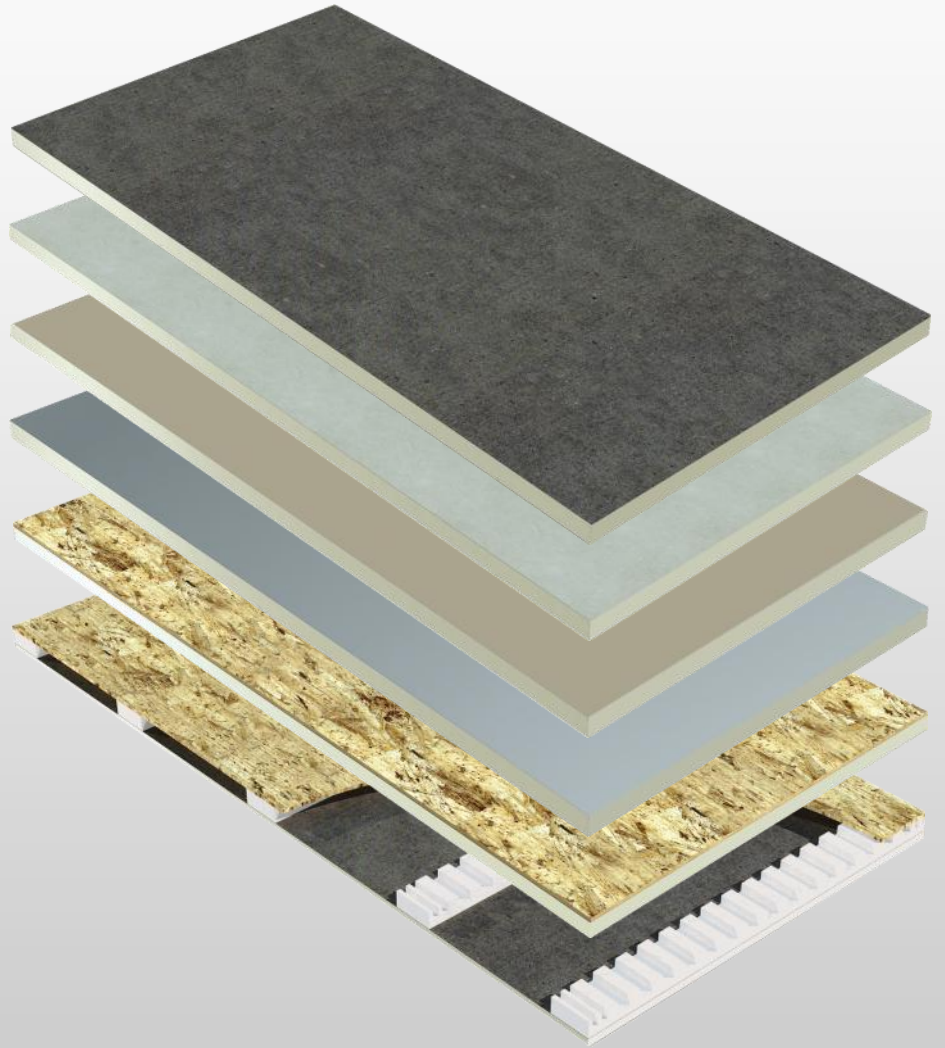

Updated: 01.23.2015



TABLE OF CONTENTS

PACKAGE AND LOADING GUIDE

TITLE	PAGE
ACFOAM®-III	3
CROSSVENT®	4-6
ACFOAM® NAIL BASE	7
ACFOAM® NAIL BASE FASTENERS	8
CV & NB WOOD COMPATABILITY	8
MANUFACTURING & SALES LOCATIONS	9



ACFOAM®-III

POLYISO ROOF INSULATION



ASTM C1289 Type II, Class 2, Grade 2 (20 psi) or Grade 3 (25 psi)

CAN/ULC-S704, Type 2, Class 3 or Type 3, Class 3

INSULATION THICKNESS	THERMAL RESISTANCE		PIECES PER UNIT	SQUARE FEET PER UNIT		TRUCKLOAD QUANTITIES (SQUARES)	PRODUCT WEIGHT (lb/sf)	RECYCLED CONTENT		
	AVERAGE LTRR VALUE	RSI		4x8	4x4			POST CONSUMER	PRE CONSUMER	TOTAL
1.0"	5.7	1.00	48	1536	768	368.64	0.315	-	6.2%	6.2%
1.1"	6.3	1.10	43	1376	688	330.24	0.329	-	6.5%	6.5%
1.2"	6.8	1.20	40	1280	640	307.20	0.342	-	6.9%	6.9%
1.3"	7.4	1.30	36	1152	576	276.48	0.356	-	7.1%	7.1%
1.4"	8.0	1.40	34	1088	544	261.12	0.369	-	7.4%	7.4%
1.5"	8.6	1.50	32	1024	512	245.76	0.383	-	7.7%	7.7%
1.6"	9.1	1.61	30	960	480	230.40	0.396	-	7.9%	7.9%
1.7"	9.7	1.71	28	896	448	215.04	0.410	-	8.1%	8.1%
1.8"	10.3	1.81	26	832	416	199.68	0.423	-	8.3%	8.3%
1.9"	10.8	1.91	25	800	400	192.00	0.437	-	8.5%	8.5%
2.0"	11.4	2.01	24	768	384	184.32	0.450	-	8.7%	8.7%
2.1"	12.0	2.11	22	704	352	168.96	0.464	-	8.9%	8.9%
2.2"	12.6	2.21	21	672	336	161.28	0.477	-	9.0%	9.0%
2.3"	13.2	2.32	20	640	320	153.60	0.491	-	9.2%	9.2%
2.4"	13.8	2.42	20	640	320	153.60	0.504	-	9.3%	9.3%
2.5"	14.4	2.53	19	608	304	145.92	0.518	-	9.4%	9.4%
2.6"	15.0	2.64	18	576	288	138.24	0.531	-	9.6%	9.6%
2.7"	15.6	2.74	17	544	272	130.56	0.545	-	9.7%	9.7%
2.8"	16.2	2.85	17	544	272	130.56	0.558	-	9.8%	9.8%
2.9"	16.8	2.96	16	512	256	122.88	0.572	-	9.9%	9.9%
3.0"	17.4	3.06	16	512	256	122.88	0.585	-	10.0%	10.0%
3.1"	18.0	3.17	15	480	240	115.20	0.599	-	10.1%	10.1%
3.2"	18.6	3.28	15	480	240	115.20	0.612	-	10.2%	10.2%
3.3"	19.2	3.39	14	448	224	107.52	0.626	-	10.3%	10.3%
3.4"	19.9	3.49	14	448	224	107.52	0.639	-	10.4%	10.4%
3.5"	20.5	3.60	13	416	208	99.84	0.653	-	10.5%	10.5%
3.6"	21.1	3.71	13	416	208	99.84	0.666	-	10.6%	10.6%
3.7"	21.7	3.82	12	384	192	92.16	0.680	-	10.6%	10.6%
3.8"	22.3	3.93	12	384	192	92.16	0.693	-	10.7%	10.7%
3.9"	23.0	4.04	12	384	192	92.16	0.707	-	10.8%	10.8%
4.0"	23.6	4.15	12	384	192	92.16	0.720	-	10.9%	10.9%
4.1"	24.2	4.26	11	352	176	84.48	0.734	-	10.9%	10.9%
4.2"	24.9	4.38	11	352	176	84.48	0.747	-	11.0%	11.0%
4.3"	25.5	4.49	11	352	176	84.48	0.761	-	11.0%	11.0%
4.4"	26.1	4.60	10	320	160	76.8	0.774	-	11.1%	11.1%
4.5"	26.8	4.71	10	320	160	76.8	0.788	-	11.2%	11.2%

NOT RECOMMENDED FOR USE IN SINGLE LAYER APPLICATIONS

To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick. LTRR Values were determined in accordance with CAN/ULC-S770-09.



ACFOAM® CROSSVENT® (1.0" AIR SPACE)



ASTM C1289 Type V, Grade 2 (20 psi) or Grade 3 (25 psi)

1" Airspace yields 9.5 square inch Net Free Area (NFA) per Linear Foot

THICKNESS 1.0" AIR SPACE	THERMAL RESISTANCE		PIECES PER UNIT	SQUARE FEET PER UNIT 4x8	TRUCKLOAD QUANTITIES (SQUARES)	PRODUCT WEIGHT (lb/sf)	RECYCLED CONTENT		
	AVERAGE LTTR VALUE	RSI					POST CONSUMER	PRE CONSUMER	TOTAL
2.5"	5.7	1.00	18	576	138.24	1.731	33.7%	19.2%	52.9%
2.6"	6.3	1.10	18	576	138.24	1.745	31.9%	19.0%	50.9%
2.7"	6.8	1.20	17	544	130.56	1.758	30.3%	18.7%	49.1%
2.8"	7.4	1.30	17	544	130.56	1.772	28.9%	18.5%	47.4%
2.9"	8.0	1.40	16	512	122.88	1.785	27.6%	18.3%	45.9%
3.0"	8.6	1.50	15	480	115.20	1.799	26.4%	18.2%	44.6%
3.1"	9.1	1.61	15	480	115.20	1.812	25.3%	18.0%	43.3%
3.2"	9.7	1.71	14	448	107.52	1.826	24.3%	17.9%	42.2%
3.3"	10.3	1.81	14	448	107.52	1.839	23.4%	17.8%	41.1%
3.4"	10.8	1.91	14	448	107.52	1.853	22.5%	17.6%	40.1%
3.5"	11.4	2.01	13	416	99.84	1.866	21.7%	17.5%	39.2%
3.6"	12.0	2.11	13	416	99.84	1.880	21.0%	17.4%	38.4%
3.7"	12.6	2.21	12	384	92.16	1.893	20.3%	17.3%	37.6%
3.8"	13.2	2.32	12	384	92.16	1.907	19.6%	17.2%	36.8%
3.9"	13.8	2.42	12	384	92.16	1.920	19.0%	17.1%	36.1%
4.0"	14.4	2.53	11	352	84.48	1.934	18.4%	17.1%	35.5%
4.1"	15.0	2.64	10	320	76.80	1.947	17.9%	17.0%	34.9%
4.2"	15.6	2.74	10	320	76.80	1.961	17.4%	16.9%	34.3%
4.3"	16.2	2.85	10	320	76.80	1.974	16.9%	16.8%	33.7%
4.4"	16.8	2.96	10	320	76.80	1.988	16.5%	16.8%	33.2%
4.5"	17.4	3.06	10	320	76.80	2.001	16.0%	16.7%	32.7%
4.6"	18.0	3.17	9	288	69.12	2.015	15.6%	16.7%	32.3%
4.7"	18.6	3.28	9	288	69.12	2.028	15.2%	16.6%	31.8%
4.8"	19.2	3.39	9	288	69.12	2.042	14.9%	16.6%	31.4%
4.9"	19.9	3.49	9	288	69.12	2.055	14.5%	16.5%	31.0%
5.0"	20.5	3.60	9	288	69.12	2.069	14.2%	16.5%	30.6%
5.1"	21.1	3.71	9	288	69.12	2.082	13.8%	16.4%	30.3%
5.2"	21.7	3.82	8	256	61.44	2.096	13.5%	16.4%	29.9%
5.3"	22.3	3.93	8	256	61.44	2.109	13.2%	16.3%	29.6%
5.4"	23.0	4.04	8	256	61.44	2.123	13.0%	16.3%	29.3%
5.5"	23.6	4.15	8	256	61.44	2.136	12.7%	16.3%	28.9%

NOT RECOMMENDED FOR USE IN SINGLE LAYER APPLICATIONS

To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick.

¹Recycled content includes glass fiber reinforced cellulosic felt faced polyisocyanurate foam portion only.
ACFoam® CrossVent® & ACFoam® CrossVent® RB calculations based on 7/16" OSB unless noted otherwise.

Truckload quantities based on 24 units 4x8.

LTTR values were determined in accordance with CAN/ULC-S770-09. Thermal resistance of unsealed air space does not apply. Only LTTR of ACFoam® portion is reported.



ACFOAM® CROSSVENT® (1.5" AIR SPACE)



ASTM C1289 Type V, Grade 2 (20 psi) or Grade 3 (25 psi)

1.5" Airspace yields 14.25 square inch Net Free Area (NFA) per Linear Foot

THICKNESS 1.5" AIR SPACE	THERMAL RESISTANCE		PIECES PER UNIT	SQUARE FEET PER UNIT 4x8	TRUCKLOAD QUANTITIES (SQUARES)	PRODUCT WEIGHT (lb/sf)	RECYCLED CONTENT		
	AVERAGE LTTR VALUE	RSI					POST CONSUMER	PRE CONSUMER	TOTAL
3.0"	5.7	1.00	15	480	115.20	1.748	33.7%	19.2%	52.9%
3.1"	6.3	1.10	15	480	115.20	1.762	31.9%	19.0%	50.9%
3.2"	6.8	1.20	14	448	107.52	1.775	30.3%	18.7%	49.1%
3.3"	7.4	1.30	14	448	107.52	1.789	28.9%	18.5%	47.4%
3.4"	8.0	1.40	14	448	107.52	1.802	27.6%	18.3%	45.9%
3.5"	8.6	1.50	13	416	99.84	1.816	26.4%	18.2%	44.6%
3.6"	9.1	1.61	13	416	99.84	1.829	25.3%	18.0%	43.3%
3.7"	9.7	1.71	12	384	92.16	1.843	24.3%	17.9%	42.2%
3.8"	10.3	1.81	12	384	92.16	1.856	23.4%	17.8%	41.1%
3.9"	10.8	1.91	12	384	92.16	1.870	22.5%	17.6%	40.1%
4.0"	11.4	2.01	11	352	84.48	1.883	21.7%	17.5%	39.2%
4.1"	12.0	2.11	10	320	76.80	1.897	21.0%	17.4%	38.4%
4.2"	12.6	2.21	10	320	76.80	1.910	20.3%	17.3%	37.6%
4.3"	13.2	2.32	10	320	76.80	1.924	19.6%	17.2%	36.8%
4.4"	13.8	2.42	10	320	76.80	1.937	19.0%	17.1%	36.1%
4.5"	14.4	2.53	10	320	76.80	1.951	18.4%	17.1%	35.5%
4.6"	15.0	2.64	9	288	69.12	1.964	17.9%	17.0%	34.9%
4.7"	15.6	2.74	9	288	69.12	1.978	17.4%	16.9%	34.3%
4.8"	16.2	2.85	9	288	69.12	1.991	16.9%	16.8%	33.7%
4.9"	16.8	2.96	9	288	69.12	2.005	16.5%	16.8%	33.2%
5.0"	17.4	3.06	9	288	69.12	2.018	16.0%	16.7%	32.7%
5.1"	18.0	3.17	9	288	69.12	2.032	15.6%	16.7%	32.3%
5.2"	18.6	3.28	8	256	61.44	2.045	15.2%	16.6%	31.8%
5.3"	19.2	3.39	8	256	61.44	2.059	14.9%	16.6%	31.4%
5.4"	19.9	3.49	8	256	61.44	2.072	14.5%	16.5%	31.0%
5.5"	20.5	3.60	8	256	61.44	2.086	14.2%	16.5%	30.6%
5.6"	21.1	3.71	8	256	61.44	2.099	13.8%	16.4%	30.3%
5.7"	21.7	3.82	8	256	61.44	2.113	13.5%	16.4%	29.9%
5.8"	22.3	3.93	7	224	53.76	2.126	13.2%	16.3%	29.6%
5.9"	23.0	4.04	7	224	53.76	2.140	13.0%	16.3%	29.3%
6.0"	23.6	4.15	7	224	53.76	2.153	12.7%	16.3%	28.9%

NOT RECOMMENDED FOR USE IN SINGLE LAYER APPLICATIONS

To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick.

¹Recycled content includes glass fiber reinforced cellulosic felt faced polyisocyanurate foam portion only.

ACFoam® CrossVent® & ACFoam® CrossVent® RB calculations based on 7/16" OSB unless noted otherwise.

Truckload quantities based on 24 units 4x8.

LTTR values were determined in accordance with CAN/ULC-S770-09. Thermal resistance of unsealed air space does not apply. Only LTTR of ACFoam® portion is reported.



ACFOAM® CROSSVENT® (2.0" AIR SPACE)



ASTM C1289 Type V, Grade 2 (20 psi) or Grade 3 (25 psi)

2.0" Airspace yields 19.0 square inch Net Free Area (NFA) per Linear Foot

THICKNESS 2.0" AIR SPACE	THERMAL RESISTANCE		PIECES PER UNIT	SQUARE FEET PER UNIT 4x8	TRUCKLOAD QUANTITIES (SQUARES)	PRODUCT WEIGHT (lb/sf)	RECYCLED CONTENT		
	AVERAGE LTRR VALUE	RSI					POST CONSUMER	PRE CONSUMER	TOTAL
3.5"	5.7	1.00	13	416	99.84	1.764	33.7%	19.2%	52.9%
3.6"	6.3	1.10	13	416	99.84	1.778	31.9%	19.0%	50.9%
3.7"	6.8	1.20	12	384	92.16	1.791	30.3%	18.7%	49.1%
3.8"	7.4	1.30	12	384	92.16	1.805	28.9%	18.5%	47.4%
3.9"	8.0	1.40	12	384	92.16	1.818	27.6%	18.3%	45.9%
4.0"	8.6	1.50	11	352	84.48	1.832	26.4%	18.2%	44.6%
4.1"	9.1	1.61	10	320	76.80	1.845	25.3%	18.0%	43.3%
4.2"	9.7	1.71	10	320	76.80	1.859	24.3%	17.9%	42.2%
4.3"	10.3	1.81	10	320	76.80	1.872	23.4%	17.8%	41.1%
4.4"	10.8	1.91	10	320	76.80	1.886	22.5%	17.6%	40.1%
4.5"	11.4	2.01	10	320	76.80	1.899	21.7%	17.5%	39.2%
4.6"	12.0	2.11	9	288	69.12	1.913	21.0%	17.4%	38.4%
4.7"	12.6	2.21	9	288	69.12	1.926	20.3%	17.3%	37.6%
4.8"	13.2	2.32	9	288	69.12	1.940	19.6%	17.2%	36.8%
4.9"	13.8	2.42	9	288	69.12	1.953	19.0%	17.1%	36.1%
5.0"	14.4	2.53	9	288	69.12	1.967	18.4%	17.1%	35.5%
5.1"	15.0	2.64	9	288	69.12	1.980	17.9%	17.0%	34.9%
5.2"	15.6	2.74	8	256	61.44	1.994	17.4%	16.9%	34.3%
5.3"	16.2	2.85	8	256	61.44	2.007	16.9%	16.8%	33.7%
5.4"	16.8	2.96	8	256	61.44	2.021	16.5%	16.8%	33.2%
5.5"	17.4	3.06	8	256	61.44	2.034	16.0%	16.7%	32.7%
5.6"	18.0	3.17	8	256	61.44	2.048	15.6%	16.7%	32.3%
5.7"	18.6	3.28	8	256	61.44	2.061	15.2%	16.6%	31.8%
5.8"	19.2	3.39	7	224	53.76	2.075	14.9%	16.6%	31.4%
5.9"	19.9	3.49	7	224	53.76	2.088	14.5%	16.5%	31.0%
6.0"	20.5	3.60	7	224	53.76	2.102	14.2%	16.5%	30.6%
6.1"	21.1	3.71	7	224	53.76	2.115	13.8%	16.4%	30.3%
6.2"	21.7	3.82	7	224	53.76	2.129	13.5%	16.4%	29.9%
6.3"	22.3	3.93	7	224	53.76	2.142	13.2%	16.3%	29.6%
6.4"	23.0	4.04	7	224	53.76	2.156	13.0%	16.3%	29.3%
6.5"	23.6	4.15	7	224	53.76	2.169	12.7%	16.3%	28.9%

NOT RECOMMENDED FOR USE IN SINGLE LAYER APPLICATIONS

To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick.

¹Recycled content includes glass fiber reinforced cellulosic felt faced polyisocyanurate foam portion only.
ACFoam® CrossVent® & ACFoam® CrossVent® RB calculations based on 7/16" OSB unless noted otherwise.
Truckload quantities based on 24 units 4x8.

LTRR values were determined in accordance with CAN/ULC-S770-09. Thermal resistance of unsealed air space does not apply. Only LTRR of ACFoam® portion is reported.



ACFOAM® NAIL BASE



ASTM C1289 Type V, Grade 2 (20 psi) or Grade 3 (25 psi)

COMPOSITE THICKNESS	THERMAL RESISTANCE		PIECES PER UNIT	SQUARE FEET PER UNIT 4x8	TRUCKLOAD QUANTITIES (SQUARES)	PRODUCT WEIGHT (lb/sf)	RECYCLED CONTENT		
	AVERAGE	RSI					POST	PRE	TOTAL
1.5"	6.3	1.10	31	992	238.08	1.697	33.7%	19.2%	52.9%
1.6"	6.9	1.20	29	928	222.72	1.711	31.9%	19.0%	50.9%
1.7"	7.4	1.30	27	864	207.36	1.724	30.3%	18.7%	49.1%
1.8"	8.0	1.40	26	832	199.68	1.738	28.9%	18.5%	47.4%
1.9"	8.6	1.50	24	768	184.32	1.751	27.6%	18.3%	45.9%
2.0"	9.1	1.60	23	736	176.64	1.765	26.4%	18.2%	44.6%
2.1"	9.7	1.70	22	704	168.96	1.778	25.3%	18.0%	43.3%
2.2"	10.3	1.80	21	672	161.28	1.792	24.3%	17.9%	42.2%
2.3"	10.9	1.90	20	640	153.60	1.805	23.4%	17.8%	41.1%
2.4"	11.4	2.00	19	608	145.92	1.819	22.5%	17.6%	40.1%
2.5"	12.0	2.10	18	576	138.24	1.832	21.7%	17.5%	39.2%
2.6"	12.6	2.21	18	576	138.24	1.846	21.0%	17.4%	38.4%
2.7"	13.2	2.31	17	544	130.56	1.859	20.3%	17.3%	37.6%
2.8"	13.8	2.42	17	544	130.56	1.873	19.6%	17.2%	36.8%
2.9"	14.4	2.52	16	512	122.88	1.886	19.0%	17.1%	36.1%
3.0"	15.0	2.63	15	480	115.20	1.900	18.4%	17.1%	35.5%
3.1"	15.6	2.73	15	480	115.20	1.913	17.9%	17.0%	34.9%
3.2"	16.2	2.84	14	448	107.52	1.927	17.4%	16.9%	34.3%
3.3"	16.8	2.95	14	448	107.52	1.940	16.9%	16.8%	33.7%
3.4"	17.4	3.05	14	448	107.52	1.954	16.5%	16.8%	33.2%
3.5"	18.0	3.16	13	416	99.84	1.967	16.0%	16.7%	32.7%
3.6"	18.6	3.27	13	416	99.84	1.981	15.6%	16.7%	32.3%
3.7"	19.2	3.37	12	384	92.16	1.994	15.2%	16.6%	31.8%
3.8"	19.8	3.48	12	384	92.16	2.008	14.9%	16.6%	31.4%
3.9"	20.5	3.59	12	384	92.16	2.021	14.5%	16.5%	31.0%
4.0"	21.1	3.70	11	352	84.48	2.035	14.2%	16.5%	30.6%
4.1"	21.7	3.81	10	320	76.80	2.048	13.8%	16.4%	30.3%
4.2"	22.3	3.92	10	320	76.80	2.062	13.5%	16.4%	29.9%
4.3"	22.9	4.03	10	320	76.80	2.075	13.2%	16.3%	29.6%
4.4"	23.6	4.14	10	320	76.80	2.089	13.0%	16.3%	29.3%
4.5"	24.2	4.25	10	320	76.80	2.102	12.7%	16.3%	28.9%

NOT RECOMMENDED FOR USE IN SINGLE LAYER APPLICATIONS

To minimize the effects of thermal bridging, Atlas strongly recommends the use of multiple layers when the total desired or specified R-value requires an insulation thickness greater than 2.7" thick.

Recycled content includes glass fiber reinforced cellulosic felt faced polyisocyanurate foam portion only.

ACFoam® Nail Base calculations based on 7/16" OSB (R-value 0.55) unless noted otherwise.

Truckload quantities based on 24 units 4x8.

LTRR values were determined in accordance with CAN/ULC-S770-09.



ATLAS NAIL BASE FASTENERS & WOOD COMPATIBILITY



ATLAS NAIL BASE FASTENERS

5/8" Pancake Head w/ T-30 Internal Drive

Two T-30 Driver Bits included in each package.

LENGTH		PACKAGING
In	mm	
3.0	76	500/PAIL
3.5	89	500/PAIL
4.0	102	500/PAIL
4.5	114	500/PAIL
5.0	127	500/PAIL
5.5	140	500/PAIL
6.0	152	500/PAIL
6.5	165	500/PAIL
7.0	178	500/PAIL
7.5	191	500/PAIL
8.0	203	500/PAIL
8.5	216	250/PAIL
9.0	229	250/PAIL
9.5	241	250/PAIL
10.0	254	250/PAIL
11.0	279	250/PAIL
12.0	305	250/PAIL
13.0	330	250/BOX
14.0	356	250/BOX
15.0	381	250/BOX
16.0	406	250/BOX
18.0	457	250/BOX

CV & NB WOOD COMPATIBILITY

THICKNESS		THERMAL RESISTANCE		AVAILABLE CERTIFICATIONS			
In	mm	OSB	CDX	FSC	FIRE-TREATED	PRESERVATIVE-TREATED	RADIANT BARRIER
7/16"	11.1	0.55	-	OSB	OSB	OSB	OSB
*15/32"	11.9	0.59	-	OSB	OSB	OSB	OSB
*1/2"	12.7	0.62	-	OSB	OSB	OSB	OSB
*19/32"	15.1	0.74	0.74	OSB/CDX	OSB/CDX	OSB/CDX	OSB/CDX
5/8"	15.9	0.78	0.78	OSB/CDX	OSB/CDX	OSB/CDX	OSB/CDX
*23/32"	18.3	0.90	0.90	OSB/CDX	OSB/CDX	OSB/CDX	OSB/CDX
3/4"	19.1	0.94	0.94	OSB/CDX	OSB/CDX	OSB/CDX	OSB/CDX

* = Non-Standard Thickness

Minimum Approved OSB Thickness = 7/16"

Minimum Approved CDX Thickness = 19/32" (5-ply Preferred)

The tabulated thermal resistance (R) values are based on Douglas fir-Larch plywood at 8% moisture content and 75°F.
2011 APA—Engineered Wood Construction Guide

POLYISO MANUFACTURING AND SALES LOCATIONS



SALES OFFICES:



CAMP HILL, PA

(800) 688-1476
Fax: (717) 975-6957

DIBOLL, TX

(800) 766-1476
Fax: (936) 829-5363

EAST MOLINE, IL

(800) 677-1476
Fax: (866) 740-6019

LAGRANGE, GA

(800) 955-1476
Fax: (706) 882-4047

NORTHGLENN, CO

(800) 288-1476
Fax: (303) 252-4417

PHOENIX, AZ

(800) 477-1476
Fax: (602) 477-8897

TORONTO, ON

(888) 647-1476
Fax: (877) 909-4001

VANCOUVER, BC

(855) 265-1476
Fax: (604) 395-8365



CORPORATE SALES AND MARKETING

2000 RIVEREDGE PARKWAY, SUITE 800
ATLANTA, GA 30328