

# FABRAL® SELECT SERIES® 12

## BRIEF PRODUCT SPECIFICATION



Electronic Theatre Controls, Middleton, WI, USA

*As one of the world's leading entertainment and architectural lighting manufacturers, innovation is synonymous with Electronic Theatre Controls. Fabral® Select Series® 12 panels were applied as a rainscreen system. Accents of colored corrugated panels traverse the exterior adding a brilliant design element that adds a pop of color to the wall system.*

### FABRAL CORE™


**You challenge us.  
And we like it.**

Your vision for a building and what you want to achieve makes us think harder. It'd be easy to say - That won't work. Instead we go with - Let's see what we can do.

**Fabral.com**  
800.884.4484

## CONCEALED FASTENER WALL PANEL SELECT SERIES® 12

Fabral® Select Series® 12, a classic concealed fastener flush panel design, provides a range of profiles and configurations for architectural, commercial and industrial applications. With three options to choose from, architects and designers have at their disposal the ultimate in design versatility in a strong, durable wall panel, fascia or soffit application. The Select Series® 12 panels can be mixed with Select Series® 612 for varying design elements which demonstrates a unique approach to using metal.

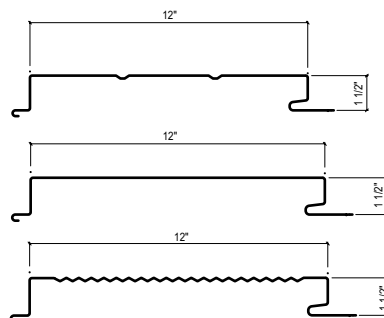

(Product details on reverse)

# FABRAL® SELECT SERIES® 12

## BRIEF PRODUCT SPECIFICATION

### MANUFACTURER DESCRIPTION

- Fabral®, 308 Alabama Blvd, Jackson, GA 30233
- **Telephone:** 800.884.4484
- **Email:** sales@fabral.com
- **Website:** www.fabral.com

### PRODUCT DESCRIPTION

<b>Acceptable Product:</b>	Fabral® Select Series® 12	
<b>Air Infiltration:</b>	ASTM E283	0.10 cfm/ft <sup>2</sup> @ 1.57 psf 0.25 cfm/ft <sup>2</sup> @ 6.24 psf
<b>Water Penetration:</b>	ASTM E331	No water leakage @ 12 psf
<b>Class 4 impact:</b>	UL2218	
<b>Class A fire:</b>	UL790	

### DESIGN INFORMATION

- Perforation available upon request
- Panel ends can be swedged for end laps
- Panel Length: Maximum - 45' Minimum - 4'
- Panel Width: 12"

### PRODUCT INSTALLATION

Select Series® panels are recommended for siding or soffits only. When used for wall applications, Select Series® panels should only be installed vertically. Install panels plumb, level and straight so it is watertight and without waves or other distortions, allowing for thermal movement considerations. Apply sealant tape or caulking as necessary at flashing and panel joints to prevent water penetration.

### PRODUCT MAINTENANCE AND WARRANTY

Fabral® provides a 20 year paint-finish warranty for cracking, chipping, peeling, fading and chalking – providing confidence in a long-lasting application.

To ensure the durability of your Select Series® panels, use proper care. Remove filings, grease, stains, marks or excess sealants from roof panels system to prevent staining. Store panels and flashings in a safe, dry environment.

### RECENT PROJECTS TO REFERENCE

Segment	Project Name	Location	Quantity	Architect/Distributor
Education	Skidmore College	Saratoga Springs, NY		Quality Roofing Supplies
Education	GA Tech Football Facility	Atlanta, GA	800 sq	Knight Architects, Inc.
Education	Lady Bird Johnson Middle School	Irving, TX	720 sq	Corgan Associates