

A SUPERIOR CHOICE FOR PERFORMANCE AND APPEARANCE

Fabral's 2 1/2" Corrugated exposed fastener panels are economical and versatile. A sleek and modern appearance adds sophistication to both contemporary designs and renovations. With exceptional durability, corrugated panels are suitable for wall and roof applications. Fabral's corrugated panels are the perfect choice for function and creativity.



SCAN FOR COLOR
AVAILABILITY

RECOMMENDED
PITCH:

2 1/2:12
AND ABOVE

GAUGE:

29 or .010

- 24" Wall Coverage with 1 Rib Overlap
- 21 1/3" Roof Coverage 1/2" Rib Height with 2 Rib Overlap
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- UL 580 Class 90 Uplift Test Rating
- Custom Cut Lengths up to 40'*

* Profile configuration, color options, minimum and maximum lengths may vary by region.



SERVING THE
INDUSTRY



LOCAL CUSTOMER
SUPPORT




ENDURING
WARRANTY



TOTAL SYSTEMS
SOLUTION



WEATHER
RESISTANT

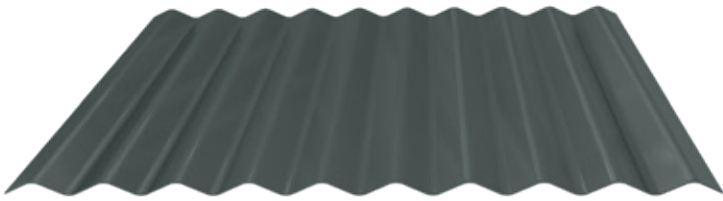


A SUPERIOR CHOICE FOR PERFORMANCE AND APPEARANCE

Fabral's 2 1/2" Corrugated exposed fastener panels are economical and versatile. A sleek and modern appearance adds sophistication to both contemporary designs and renovations. With exceptional durability, corrugated panels are suitable for wall and roof applications. Fabral's corrugated panels are the perfect choice for function and creativity.

Actual metal samples are available; request samples prior to installation. Due to product improvements, changes and other factors, Fabral reserves the right to change or delete information here-in without prior notice.

PANEL SPECIFICATIONS

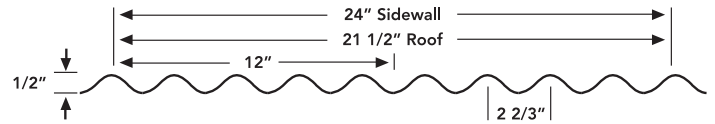

80 SCREWS	OSB or PLYWOOD	PURLINS
PER SQUARE RECOMMENDED	#14 x 1" Woodtite Type 17	#10 x 1 1/2" HLX Type 17

SCREW PATTERN



ROOFING - EAVES, RIDGES, AND ENDLAPS



ROOFING - INTERMEDIATE SUPPORT
SIDING - ALL SUPPORTS



SERVING THE INDUSTRY



LOCAL CUSTOMER SUPPORT



ENDURING WARRANTY



TOTAL SYSTEMS SOLUTION



WEATHER RESISTANT