



### FABRAL® 4" RIB EXPOSED FASTENER ROOFING & SIDING PANEL


A classically designed exposed fastener panel with 4" Rib® spacing, exceptional durability, and unlimited color options. 4" Rib® is a preferred choice for function and creativity. The unique construction allows panels to follow every curve of your design. It's suitable for both wall and roof applications. 4" Rib® can be applied only on siding in vertical and horizontal orientations.

Kennesaw State University Soccer Stadium, Kennesaw, GA

#### PANEL SPECIFICATIONS


The panels shown are the standard options with nominal dimensions. Panel material (e.g., steel or aluminum) and paint type will limit the available options. Other versions available. Contact Fabral for more information.

##### 44 3/8" COIL

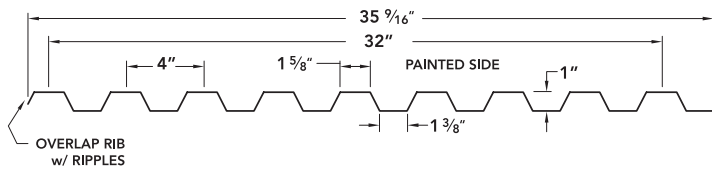

#### ROOF & WALL APPLICATION

##### 48 1/4" COIL

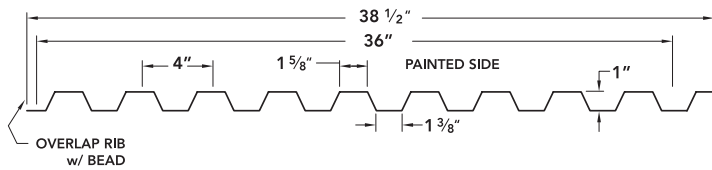

#### WALL ONLY APPLICATION

#### WARRANTY COVERAGE

Fabral® provides a 30-year paint-finish warranty against cracking, chipping, peeling, fading, and chalking, providing confidence in a long-lasting application.

#### PRODUCT INSTALLATION

Install panels plumb, level, and straight so they are watertight and without waves or other distortions, allowing for thermal movement considerations. Sealant tape or caulking should be applied as necessary at flashing and panel joints to prevent water penetration.



SERVING THE INDUSTRY



LOCAL CUSTOMER SUPPORT



ENDURING WARRANTY



TOTAL SYSTEMS SOLUTION



WEATHER RESISTANT



### DESIGN INFORMATION

- **Perforation Available Upon Request**
- **Roof Slope:** Minimum Required - 2 1/2:12
- **Panel Length:** Maximum - 45' Minimum - 6'
- **Panel Width Options:** 48", 32"
- **Panel Variation 8" Rib is Available**

### PRODUCT DESCRIPTION

- **Acceptable Product:** Fabral® 4" Rib®
- **Class 4 Impact:** UL2218
- **Class A Fire:** UL790

Wind Uplift & Fastener Spacing calculations are available upon request.

**GRAVITY LOAD TABLE (PSF)** Note: Allowable loads based on AISI and Aluminum Association Specifications. Allowable loads are based on stress only.

SUBSTRATE	SPAN	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
26 ga. Steel	3	58	43	33	26	-	-	-
24 ga. Steel	3	58	42	32	26	-	-	-
22 ga. Steel	3	78	57	44	35	28	23	-
20 ga. Steel	3	96	71	54	43	35	29	24
18 ga. Steel	3	126	93	71	56	45	38	32
.032" Aluminum	3	53	39	30	23	-	-	-
.040" Aluminum	3	73	53	41	32	26	22	-
.050" Aluminum	3	97	71	55	43	35	29	24

### PRODUCT MAINTENANCE

#### To Ensure the Durability of 4" Rib® Panels:

1. Use proper care.
2. Remove filings, grease, stains, marks, or excess sealants from the roof panel system to prevent staining.
3. Store panels and flashings in a safe, dry environment.



SERVING THE  
INDUSTRY



LOCAL CUSTOMER  
SUPPORT



ENDURING  
WARRANTY



TOTAL SYSTEMS  
SOLUTION



WEATHER  
RESISTANT