

A RESILIENT OPTION FOR ROOFING AND SIDING APPLICATIONS

Manufactured from high-strength steel, the ProClad® panel is ideal for post-frame, agricultural, and residential applications. Beautiful and durable, ProClad® can be an excellent choice for wall or roof installations.

WARRANTY COVERAGE		
	(G90) GALVANIZED	(AZ50) GALVALUME
FILM INTEGRITY	LIFETIME	LIFETIME
CHALK & FADE	30 YEARS	30 YEARS
PERFORATION (WALLS)	25 YEARS	20 YEARS
PERFORATION (ROOF)	20 YEARS	20 YEARS

RECOMMENDED PITCH:	2½:12 AND ABOVE	GAUGE:	29 or 26
--------------------	---------------------------	--------	-----------------

- 36" Coverage with 5/8" Seam Height
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- High Performance WeatherXL SMP Paint System
- Custom Cut to Lengths up to 40'*

* Profile configuration, color options, minimum and maximum lengths may vary by region.



SCAN FOR COLOR
AVAILABILITY



SERVING THE
INDUSTRY



LOCAL CUSTOMER
SUPPORT




ENDURING
WARRANTY



TOTAL SYSTEMS
SOLUTION



WEATHER
RESISTANT

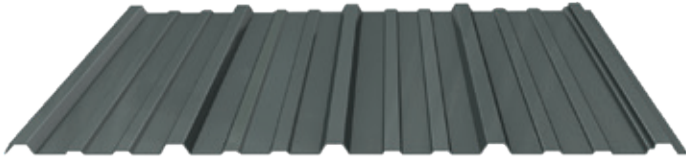


A RESILIENT OPTION FOR ROOFING AND SIDING APPLICATIONS

Manufactured from high-strength steel, the ProClad® panel is ideal for post-frame, agricultural, and residential applications. Beautiful and durable, ProClad® can be an excellent choice for wall or roof installations.

Actual metal samples are available; request samples prior to installation. Due to product improvements, changes and other factors, Fabral reserves the right to change or delete information here-in without prior notice.

PANEL SPECIFICATIONS



80 SCREWS	OSB or PLYWOOD	PURLINS
PER SQUARE RECOMMENDED	#14 x 1" Woodtite Type 17	#10 x 1 1/2" HLX Type 17

SCREW PATTERNS



INTERMEDIATE ROOF PURLINS AND ALL SIDING



EAVES AND ENDLAPS - ROOF PURLINS

SIDELAP DETAIL



SERVING THE INDUSTRY



LOCAL CUSTOMER SUPPORT



ENDURING WARRANTY



TOTAL SYSTEMS SOLUTION



WEATHER RESISTANT