
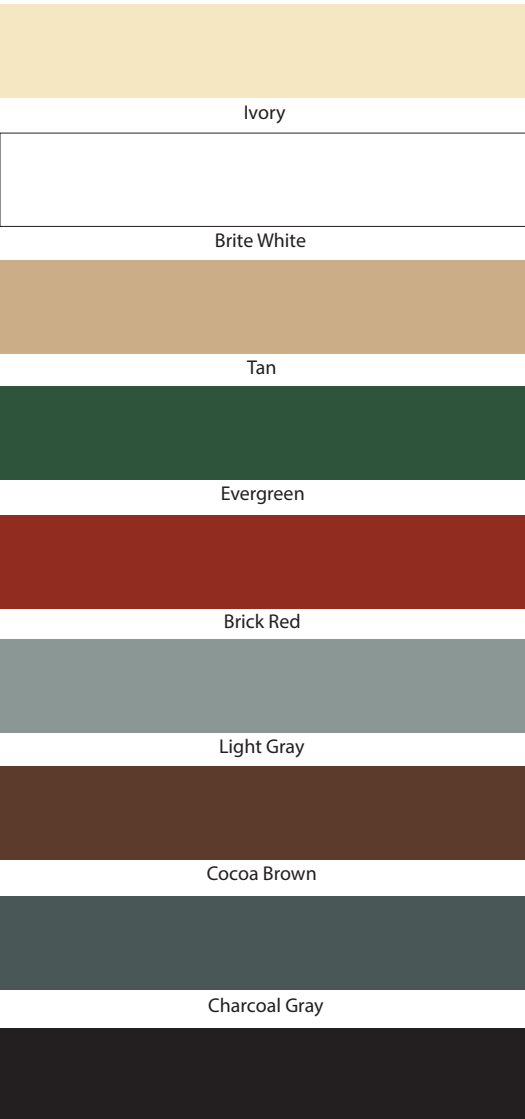


## PANEL SPECS

- Minimum pitch recommended 2½:12
- 36" coverage with 1/2" rib height
- UL 790 Class A Fire Resistance Rating
- UL 2218 Class 4 Hail Impact Resistance
- High performance Enduracote paint system features an Energy Star® approved standard color offering
- Custom cut to lengths up to 40'

## SUBSTRATES

- 29 gauge full hard galvanized steel
- G60 galvanized

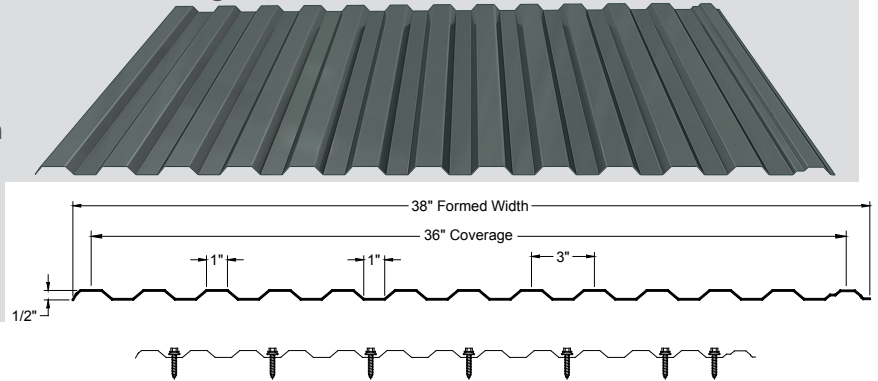

## COMMON FLASHINGS

<p><b>RIDGE CAP</b></p> <p>AR3</p>	<p><b>OUTSIDE CORNER/RAKE</b></p> <p>AC1</p>	<p><b>EAVE TRIM</b></p> <p>AE1</p>
<p><b>J-TRIM</b></p> <p>AJ3</p>	<p><b>DRIP CAP</b></p> <p>AD1</p>	<p><b>ABG1</b></p> <p>ABG1</p>
<p><b>DOUBLE ANGLE</b></p> <p>AZ2</p>	<p><b>TRACK COVER</b></p> <p>AH4 (Replaces STC-503) Matches Cannonhall Trim</p>	

## Prime Rib - Load Table

Purlin or Girt Spacing (inches)	Maximum Gravity Load Positive (LB/Ft2)	Deflection at Maximum Gravity Load
24	103	.133
30	53	.166

To order, contact your local Fabral facility:  
 1820 East 26th Street  
 Marshfield, WI 54449  
 (800) 528-0878

600 15th Avenue N.E.  
 St. Joseph, MN 56374  
 (800) 873-3440

Color samples are as close to actual as permitted by 4-color process printing.  
 Actual color samples are available from Fabral.  
 All Enduracote® colors are ENERGY STAR® approved.