




### COMMERCIAL RIB OFFERING


#### EXPOSED FASTENER ROOFING & SIDING PANEL

Fabral's economical and versatile PBR and PBU exposed fastener panels can be used on both wall and roof applications. The traditional look of these panels will add a classic touch to your project. Exceptional durability and a wide range of color options make PBR and PBU panels the perfect choice for function and creativity. Both PBR and PBU panels are available with multiple perforation options for even more design flexibility.


**PBR:**

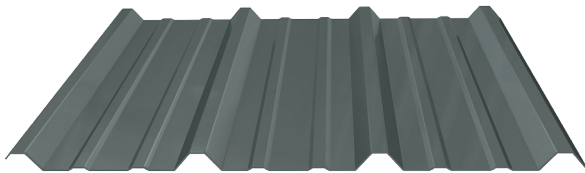

**PBU:**

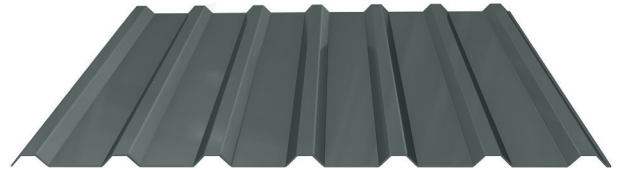

**BRITE WHITE 444**



**POLAR WHITE 455**



**IVORY 451**



**LIGHT STONE 453**



**SAHARA TAN 457**



**TAUPE 458**



**KOKO BROWN 452**



**BURNISHED SLATE 446**



**ASH GRAY 442**



**LIGHT GRAY 889**



**GRAY 447**



**CHARCOAL GRAY 851**



**TRUE BLACK 882**



**RUSTIC RED 456**



**BRITE RED 443**



**GALLERY BLUE 449**





**HUNTER GREEN 450**





**COPPER PENNY 448**

Along with the Weather XL™ colors above, PBR and PBU panels are also available in Bare Galvalume and three polyester colors; Polar White 140, Light Stone 147 and Sahara Tan 148.

## PBR PRODUCT SPECS:

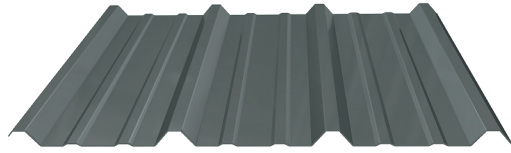

## PBU PRODUCT SPECS:

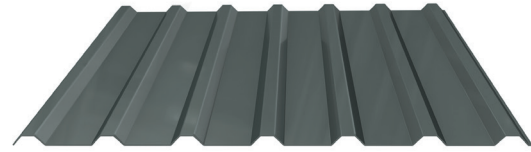

MINIMUM  
RECOMMENDED  
SLOPE:

**1:12**

GAUGE:

**26**

MINIMUM  
RECOMMENDED  
SLOPE:

**2 1/2:12**

GAUGE:

**26**

### PURLIN

Maximum Spacing  
5' On-Center

### REVERSE RUN

Available

### PANEL LENGTH

Maximum 45'  
Minimum 4'

### PANEL WIDTH

36"  
Coverage

## GRAVITY LOAD TABLE:

PANEL/SUBSTRATE	SPAN	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"
PBR 26 GA Galvalume	3	245	170	125	96	76	61
PBU 26 GA Galvalume	3	181	126	92	71	56	45

Note: Allowable loads based on AISI Specifications. Allowable loads are based on stress only.

## PRODUCT INSTALLATION:

Install panels plumb, level and straight so it is watertight and without waves or other distortions, allowing for thermal movement considerations. Apply sealant tape or caulking as necessary at flashing and panel joints to prevent water penetration.

## PRODUCT TESTING:

- UL 790 Class A Fire Resistance
- UL 2218 Class 4 Hail Impact Resistance

## PRODUCT MAINTENANCE & WARRANTY:

To ensure the durability of your panels, use proper care. Remove filings, grease, stains, marks or excess sealants from roof panels system to prevent staining. Store panels and flashings in a safe, dry environment.

- Lifetime Film Integrity Warranty for Walls and Roofs
- 30-Year Warranty Against Fade & Chalk for Walls and Roofs
- 40-Year Non-Perforation Warranty for Walls and Roofs